

Пиранометр SMP12

Технические характеристики

По вопросам продаж и поддержки обращайтесь:

Алматы (727)345-47-04
Ангарск (3955)60-70-56
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Благовещенск (4162)22-76-07
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Владикавказ (8672)28-90-48
Владимир (4922)49-43-18
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Коломна (4966)23-41-49
Кострома (4942)77-07-48
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Курган (3522)50-90-47
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижегород (831)429-08-12
Новокузнецк (3843)20-46-81
Ноябрьск (3496)41-32-12
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Петрозаводск (8142)55-98-37
Псков (8112)59-10-37
Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Саранск (8342)22-96-24
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Сыктывкар (8212)25-95-17
Тамбов (4752)50-40-97
Тверь (4822)63-31-35

Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)33-79-87
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Улан-Удэ (3012)59-97-51
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Чебоксары (8352)28-53-07
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Чита (3022)38-34-83
Якутск (4112)23-90-97
Ярославль (4852)69-52-93

Россия +7(495)268-04-70

Казахстан +(727)345-47-04

Беларусь +(375)257-127-884

Узбекистан +998(71)205-18-59

Киргизия +996(312)96-26-47

эл.почта: kez@nt-rt.ru || сайт: <http://kippzonen.nt-rt.ru/>



Fast Response Spectrally Flat Class A Pyranometer

For accurate all-weather solar irradiance measurement

Reports solar irradiance, internal humidity and temperature, tilt angle

ISO 9060:2018 and IEC 61724-1:2021 Class A compliant

Dome heating to prevent dew and frost

Best-in-class surge protection conforms to EN 61000-6-2 Industrial standard

Maintenance-free operation – no moving parts that can wear out

Easy system integration – RS-485 and Modbus® RTU compatible

Fully Class A compliant

The SMP12 is fully ISO 9060:2018 and IEC 61724:2021 compliant with built-in dome heating to prevent dew and frost. Built on strong foundations of SMP10 to achieve reliable all-weather performance.

Very low Zero offset A

The new micro-thermopile, diffuser and filter combine to give a spectrally flat response with extremely low zero offsets; improving the accuracy of the measurements even further.

Remote tilt angle monitoring

Long-term correct POA tilt angle is crucial for reliable and accurate measurements. The SMP12 offers $\pm 0.5^\circ$ tilt angle measurement accuracy with long-term stability without recalibration.

Easy system integration

Industry standard RS-485 connectivity and the Modbus® RTU protocol make it easy to integrate the SMP12 with data loggers and SCADA systems.

Dome heating for untouchable precision

Integrated dome heating with no moving parts maintains a slightly higher temperature than the surrounding air, mitigating the effects of morning dew and frost on the accuracy of your measurements.

Best-in-class surge protection

To protect the instrument in installations with poor grounding, less reliable power sources, or more lightning the SMP12 offers surge protection that conforms to EN 61000-6-2 Industrial standard for Measurement, Control and Laboratory Use. This greatly reduces the risk of failure and the need for expensive onsite replacements.


Technical Specifications

SMP12


ISO 9060:2018	Fast Response Spectrally Flat Class A
IEC 61724-1:2021	Class A monitoring
Spectral range (20% points)	280 to 3000 nm
Spectral range (50% points)	285 to 2750 nm
Spectral error clear sky GHI	< ±0.1%
Spectral selectivity 350 to 1500 nm	< ±3%
Response time (63%)	< 0.15 s
Response time (95%)	< 0.5 s
Zero offset A	< ±1 W/m ²
Zero offset B	< ±1.5 W/m ²
Total zero off-set including A&B	< ±3 W/m ²
Non-stability (change/ 5-years)	< ±0.5%
Non-linearity (100 to 1000 W/m ²)	< ±0.2%
Directional response (up to 80° with 1000 W/m ² beam)	< ±10 W/m ²
Temperature response (-10 °C to +40 °C)	< ±1%
Temperature response (-40 °C to +70 °C)	< ±2%
Operating humidity range	0 to 100%
Accuracy of bubble level	< ±0.1°
Tilt response due to change in tilt from 0° to 180° at 1000 W/m ² irradiance	< ±0.1%
Operating temperature range	-40 °C to +70 °C
Storage temperature range	-40 °C to +80 °C
Digital tilt measurement	
Tilt range	0° to 360°
Tilt accuracy	< ±0.5°
Pitch range	-180° to 180°
Roll range	-180° to 180°
Internal humidity measurement	
Range	0 to 100% RH
Accuracy	< ±3%
Resolution	1%
Communication	Modbus® RTU over 2-wire RS-485
Power supply	10 to 30 VDC
Power consumption	Maximum 3.5 W
Inrush current	1.5 A for 10 µs
Surge protection class	EN 61000-6-2 Industrial standard for measurement, control and laboratory use
Ingress Protection (IP) Rating	67
Calibration Interval	5-years*
Weight	500 g

* Recalibration should be performed at least once every 5-years after the installation date to ensure the instrument remains within its specified performance parameters. To comply with IEC61724-1 Class A system requirements, re-calibration is required every 2 years after the date of installation.

Dimensions

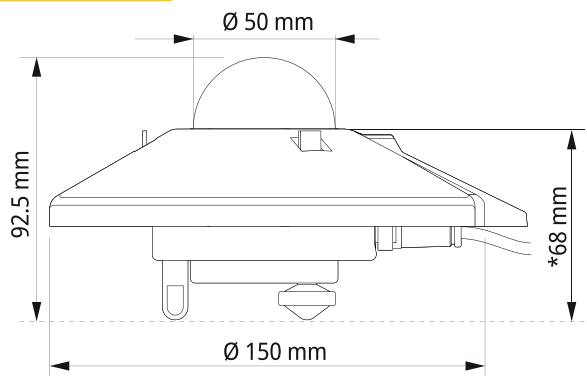

With feet

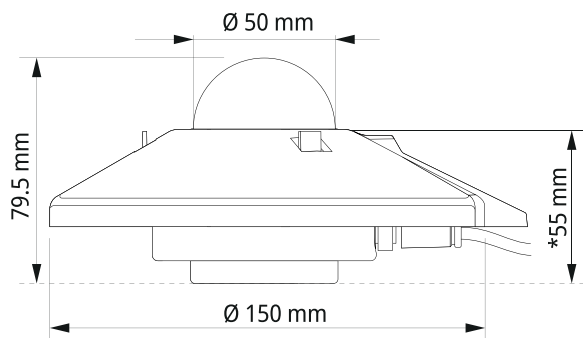

Without feet

* = Sensor height



По вопросам продаж и поддержки обращайтесь:

Алматы (727)345-47-04
Ангарск (3955)60-70-56
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Благовещенск (4162)22-76-07
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Владикавказ (8672)28-90-48
Владимир (4922)49-43-18
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Коломна (4966)23-41-49
Кострома (4942)77-07-48
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Курган (3522)50-90-47
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижегород (831)429-08-12
Новокузнецк (3843)20-46-81
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Петрозаводск (8142)55-98-37
Псков (8112)59-10-37
Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Саранск (8342)22-96-24
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Сыктывкар (8212)25-95-17
Тамбов (4752)50-40-97
Тверь (4822)63-31-35

Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)33-79-87
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Улан-Удэ (3012)59-97-51
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Чебоксары (8352)28-53-07
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Чита (3022)38-34-83
Якутск (4112)23-90-97
Ярославль (4852)69-52-93

Россия +7(495)268-04-70

Казахстан +(727)345-47-04

Беларусь +(375)257-127-884

Узбекистан +998(71)205-18-59

Киргизия +996(312)96-26-47

эл.почта: kez@nt-rt.ru || сайт: <http://kippzonen.nt-rt.ru/>