

Пиранометры СМР21, СМР22, SМР22

Технические характеристики

По вопросам продаж и поддержки обращайтесь:

Алматы (727)345-47-04
Ангарск (3955)60-70-56
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Благовещенск (4162)22-76-07
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Владикавказ (8672)28-90-48
Владимир (4922)49-43-18
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Коломна (4966)23-41-49
Кострома (4942)77-07-48
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Курган (3522)50-90-47
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижегород (831)429-08-12
Новокузнецк (3843)20-46-81
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Петрозаводск (8142)55-98-37
Псков (8112)59-10-37
Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Саранск (8342)22-96-24
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Сыктывкар (8212)25-95-17
Тамбов (4752)50-40-97
Тверь (4822)63-31-35

Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)33-79-87
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Улан-Удэ (3012)59-97-51
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Чебоксары (8352)28-53-07
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Чита (3022)38-34-83
Якутск (4112)23-90-97
Ярославль (4852)69-52-93

Россия +7(495)268-04-70

Казахстан +(727)345-47-04

Беларусь +(375)257-127-884


Узбекистан +998(71)205-18-59

Киргизия +996(312)96-26-47

эл.почта: kez@nt-rt.ru || сайт: <http://kippzonen.nt-rt.ru/>

Applications

Scientific Research
Baseline Surface Radiation Network

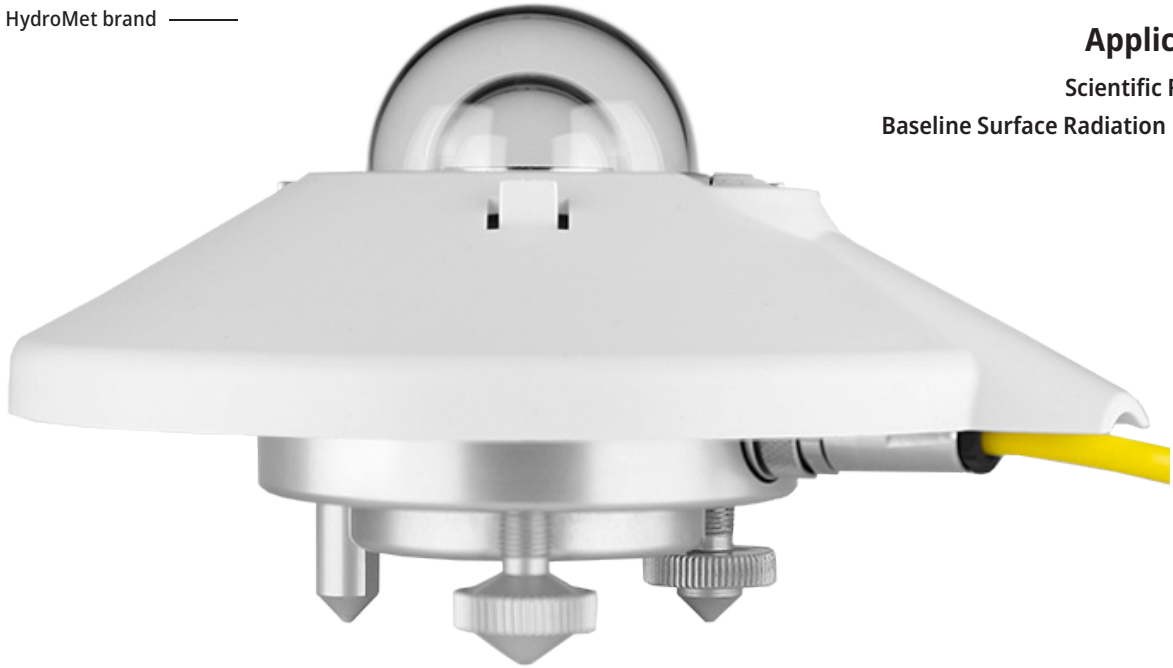

Pyranometer

Premium pyranometers for highest requirements

ISO 9060 Spectrally Flat Class A

Highest level accuracy

Broadest spectral range

Analog and digital outputs

5 years warranty

ISO 9060 & IEC 61724 Class A

Fully compliant with ISO 9060:2018 spectrally flat Class A specifications, the CMP21, CMP22, and SMP22 provide solar irradiance measurements with highest accuracy and reliability. They are the sensors of choice for renowned research institutes around the world. Adding highest-quality quartz domes for a wider spectral range makes the CMP22 and the SMP22 the most accurate pyranometers available.

Minimized maintenance

The CMP21 and CMP22 as well as the smart SMP22 are extremely robust pyranometers that have been designed to fulfill the highest requirements of scientific research. The CMP21 and CMP22 have an easy-to-remove drying cartridge filled with easy-to-replace desiccant that is supplied in convenient refill packets. In contrast, the SMP is fitted with a maintenance-free internal desiccant that lasts at least 10 years.

Analog or digital outputs

The CMP21 and CMP22 do not require any power. Incoming solar radiation generates a continuous millivolt output, which is converted in a data logger to irradiance in W/m^2 using the calibrated sensitivity. For easy integration into SCADA systems the SMP22 has Modbus® RTU RS-485 serial communication, plus an amplified analog output. A specific, individual polynomial correction function is stored in each SMP22.

5 years warranty

All pyranometers from Kipp & Zonen come with a 5-year warranty and we have service and calibration centers around the world.

Technical Specifications

	CMP21	CMP22	SMP22
Classification to ISO 9060:2018	Spectrally Flat Class A	Spectrally Flat Class A	Spectrally Flat Class A
Sensitivity	7 to 14 $\mu\text{V/W/m}^2$	7 to 14 $\mu\text{V/W/m}^2$	-
Impedance	10 to 100 Ω	10 to 100 Ω	-
Expected output range (0 to 1500 W/m ²)	0 to 21 mV	0 to 21 mV	-
Maximum operational irradiance	4000 W/m ²	4000 W/m ²	4000 W/m ²
Analogue output • V-version	-	-	0 to 1 V
Analogue output range • V-version*	-	-	-200 to 2000 W/m ²
Analogue output • A-version	-	-	4 to 20 mA
Analogue output range • A-version*	-	-	0 to 1600 W/m ²
Serial output	-	-	RS-485 Modbus® RTU
Serial output range	-	-	-400 to 4000 W/m ²
Response time (63 %)	< 1.66 s	< 1.66 s	< 0.7 s
Response time (95 %)	< 5 s	< 5 s	< 2 s
Spectral range (20 % points)	270 to 3000 nm	210 to 3600 nm	210 to 3600 nm
Spectral range (50 % points)	285 to 2800 nm	210 to 3600 nm	350 to 3500 nm
Zero offsets (unventilated)			
(a) thermal radiation (at 200 W/m ²)	< ± 7 W/m ²	< ± 3 W/m ²	< ± 3 W/m ²
(b) temperature change (5 K/h)	< ± 2 W/m ²	< ± 1 W/m ²	< ± 1 W/m ²
(c) total zero offset	< ± 9 W/m ²	< ± 4 W/m ²	< ± 4 W/m ²
Non-stability (change/year)	< $\pm 0.5\%$	< $\pm 0.5\%$	< $\pm 0.5\%$
Non-linearity (100 to 1000 W/m ²)	< $\pm 0.2\%$	< $\pm 0.2\%$	< $\pm 0.2\%$
Directional response (up to 80° with 1000 W/m ² beam)	< ± 10 W/m ²	< ± 5 W/m ²	< ± 5 W/m ²
Spectral selectivity (350 to 1500 nm)	< $\pm 3\%$	< $\pm 3\%$	< $\pm 3\%$
Tilt response (0° to 180° at 1000 W/m ²)	< $\pm 0.2\%$	< $\pm 0.2\%$	< $\pm 0.2\%$
Temperature response	< $\pm 1\%$ (-20 to +50°C)	< $\pm 0.5\%$ (-20 to +50°C)	< $\pm 0.3\%$ (-20 to +70°C) < $\pm 0.3\%$ (-40 to +70°C)
Field of view	180°	180°	180°
Accuracy of bubble level	$\pm 0.1^\circ$	$\pm 0.1^\circ$	$\pm 0.1^\circ$
Power consumption (at 12 VDC)	-	-	V-version: 55 mW A-version: 100 mW
Supply voltage	-	-	5 to 30 VDC
Software, Windows™	-	-	SmartExplorer Software, for configuration, test and data logging
Detector type	Thermopile	Thermopile	Thermopile
Operating temperature range	-40 °C to +80 °C	-40 °C to +80 °C	-40 °C to +70 °C
Storage temperature range	-40 °C to +80 °C	-40 °C to +80 °C	-40 °C to +80 °C
Humidity range	0 to 100%	0 to 100%	0 to 100%
MTBF (Mean Time Between Failures)	> 10 years	> 10 years	> 10 years
Ingress Protection (IP) rating	IP67	IP67	IP67
Recommended applications	Scientific research requiring the highest level of measurement accuracy and reliability under all conditions.		
Dimensions	CMP21	CMP22	SMP22
Diameter x height	150 x 92.5 mm	150 x 92.5 mm	150 x 92.5 mm
Diffusor height	68 mm	68 mm	68 mm
Cable length	10, 25, or 50 m	10, 25, or 50 m	10, 25, or 50 m



По вопросам продаж и поддержки обращайтесь:

Алматы (727)345-47-04
Ангарск (3955)60-70-56
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Благовещенск (4162)22-76-07
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Владикавказ (8672)28-90-48
Владимир (4922)49-43-18
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Коломна (4966)23-41-49
Кострома (4942)77-07-48
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Курган (3522)50-90-47
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижегород (831)429-08-12
Новокузнецк (3843)20-46-81
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Петрозаводск (8142)55-98-37
Псков (8112)59-10-37
Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Саранск (8342)22-96-24
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Сыктывкар (8212)25-95-17
Тамбов (4752)50-40-97
Тверь (4822)63-31-35

Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)33-79-87
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Улан-Удэ (3012)59-97-51
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Чебоксары (8352)28-53-07
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Чита (3022)38-34-83
Якутск (4112)23-90-97
Ярославль (4852)69-52-93

Россия +7(495)268-04-70

Казахстан +(727)345-47-04

Беларусь +(375)257-127-884

Узбекистан +998(71)205-18-59

Киргизия +996(312)96-26-47

эл.почта: kez@nt-rt.ru || сайт: <http://kippzonen.nt-rt.ru/>